




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: G06F 13/00, H04M 11/00		A1	(11) International Publication Number: WO 98/11487
			(43) International Publication Date: 19 March 1998 (19.03.98)
(21) International Application Number: PCT/US97/16184		(81) Designated States: AL, AM, AT, AT (Utility model), AU (Petty patent), AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 12 September 1997 (12.09.97)		<p>Published</p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
(30) Priority Data: 08/710,114 12 September 1996 (12.09.96) US			
(71) Applicant: AUDIBLE, INC. [US/US]; 65 Willowbrook Boulevard, Wayne, NJ 07470 (US).			
(72) Inventors: KATZ, Donald, R.; 4 Russell Terrace, Montclair, NJ 07042 (US). LAU, Edwin, J.; 1266 Shasta Avenue, San Jose, CA 95126 (US). MOTT, Timothy; 110 Old Mill Road, P.O. Box 6289, Ketchum, ID 83340 (US). BRENNEMAN, Scott, A.; 299 Waverly Street, Menlo Park, CA 94025 (US). CHE-MING JUN, Benjamin; 1081-B Tanland Drive, Palo Alto, CA 94303 (US). HONG-YEN PAI, Samuel; 340 Marmona Drive, Menlo Park, CA 94025 (US).			
(74) Agents: SALTER, James, H. et al.; Blakely, Sokoloff, Taylor & Zafman LLP, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025 (US).			

(54) Title: A DIGITAL INFORMATION LIBRARY AND DELIVERY SYSTEM

(57) Abstract

A computer network based digital information library system employing authentication and encryption protocols for the secure transfer of digital information library programs to a client computer system (214) and a mobile digital information playback device (212) removably connectable to the client computer system. The present invention is a computer network based library and information delivery system for accessing and obtaining selected digital information files. The library and information delivery system comprises: 1) a library server (260) having a plurality of digital information files; 2) a client computer system (214) coupled to the library server (260) over a network (240); and 3) a mobile device (212) removably connectable to the client computer system (214), the client computer system (214) including logic for requesting a download of a selected one or more of the digital information files from the library server (260), the client computer system (214) further including logic for downloading the selected one or more of the digital information files to the mobile device (212).

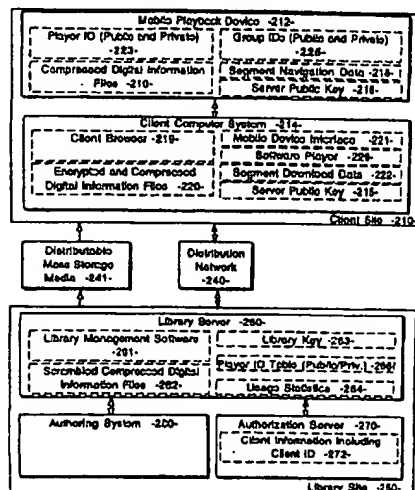

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

1
**A DIGITAL INFORMATION LIBRARY
AND DELIVERY SYSTEM**

FIELD OF THE INVENTION

The present invention relates generally to a digital information transmission, receiving, and playback system. Specifically, the present invention pertains to a computer network based digital information library providing interactive client computer access.

DESCRIPTION OF RELATED ART

Recent technological advances in the compression of digital data and the expansion of storage capacities of computer systems together with the increased bandwidth of computer network infrastructures have created new possibilities for personalized access to and usage of large amounts of digital information. One form of this type of digital information is audio information delivered across a computer network as digitized information.

In the field of interactive digital information transmission, receiving, and playback systems, several patents are known to the present applicants. U.S. Patent No. 5,132,992, issued July 21, 1992 to Yurt et al. (Yurt), describes a system of distributing video and/or audio information employing digital signal processing to achieve high rates of data compression. The Yurt patent describes a transmission system including a conversion means for placing the items from a source material library into a predetermined format as formatted data. Audio data is compressed by an audio compressor by application of an adaptive differential pulse code modulation (ADPCM) process to the audio data. Stored items are accessed in the compressed data library through the use of a unique address code assigned to each item during storage encoding. The unique address code is used for requesting and accessing information and items throughout the Yurt transmission and receiving process. The Yurt transmission system includes means by which a user enters a customer identifier (ID) code by which the system accesses the users account, and indicates to the system that the user is a subscriber of the system. If a subscriber is in good standing, the Yurt system delivers selected titles using the described techniques.

One significant problem with the audio transmission and receiving system described in Yurt is the lack of an effective means for ensuring the security of the digital information library and of the items downloaded to a user from the digital information library. Although Yurt describes the use of a unique identification code assigned to items in the library and a customer ID code assigned to particular users, no authentication protocols or encryption techniques are described to prevent the unauthorized creation of clone libraries or the unauthorized download or copying of library items. Secondly, Yurt and related prior art does not describe an authentication or encryption means providing secure transactions between a server based digital information

2

library supporting a client computer system having an interface to a mobile playback device. Thirdly, the prior art does not describe a mechanism for selecting a digital information passage to be previewed. Prior art systems also do not describe a system whereby only part of a program gets downloaded from a client computer system to a mobile playback device depending on how much storage space is available in the mobile playback device. Prior art systems also do not describe a mechanism for specifying multiple programs to be downloaded from a digital information library into a mobile playback device. Prior art systems also do not detail the processes required in the authoring system to generate content for the digital information library. Finally, prior art systems do not describe an accounting system whereby library content providers can perform real-time queries on usage information related to the access of library items.

SUMMARY OF THE INVENTION

The preferred embodiment of the present invention is a computer network based digital information library system employing authentication, targeting, and encryption protocols for the secure transfer of digital information library programs to a client computer system and a mobile digital information playback device removably connectable to the client computer system. The present invention is a computer network based library and information delivery system for accessing and obtaining selected digital information files. The library and information delivery system comprises: 1) a library server having a plurality of digital information files; 2) a client computer system coupled to the library server over a network; and 3) a mobile device removably connectable to the client computer system, the client computer system including logic for requesting a download of a selected one or more of the digital information files from the library server, the client computer system further including logic for downloading the selected one or more of the digital information files to the mobile device.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included as part of the present specification, illustrate the presently preferred embodiment of the present invention and together with the general description given above and the detailed description of the preferred embodiment given below serve to explain and teach the principles of the present invention.

Figure 1 illustrates a typical computer platform on which the present invention may be implemented.

Figure 2 illustrates a high level block diagram of the computer network based digital information library system of the present invention.

Figure 3 illustrates a high level block diagram of the authoring system of the present invention.

Figure 4 illustrates an alternative embodiment having a plurality of library servers.

Figure 5 illustrates an alternative embodiment having a plurality of library server processes.

Figure 6 illustrates an alternative embodiment having a single authoring/authorization server.

Figure 7 illustrates an alternative embodiment wherein client computer systems have a local library.

Figure 8 illustrates an alternative embodiment wherein mobile playback devices have a direct network interface in lieu of a client computer system.

Figure 9 illustrates an alternative embodiment wherein a kiosk is used to retain and distribute selected programming.

Figure 10 illustrates an alternative embodiment wherein all system components are connected through a common network.

5
DETAILED DESCRIPTION OF
THE PREFERRED EMBODIMENT

The preferred embodiment of the present invention is a computer network based digital information library system employing authentication, targeting, and encryption protocols for the secure transfer of digital information library programs to a client computer system and a mobile digital information playback device removably connectable to the client computer system. In the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be apparent to one of ordinary skill in the art that these specific details need not be used to practice the present invention. In other instances, well known structures, interfaces, and processes have not been shown in detail in order not to unnecessarily obscure the present invention.

Figure 1 illustrates a typical data processing system upon which one embodiment of the present invention is implemented. It will be apparent to those of ordinary skill in the art, however that other alternative systems of various system architectures may also be used. The data processing system illustrated in Figure 1 includes a bus or other internal communication means 101 for communicating information, and a processor 102 coupled to the bus 101 for processing information. The system further comprises a random access memory (RAM) or other volatile storage device 104 (referred to as main memory), coupled to bus 101 for storing information and instructions to be executed by processor 102. Main memory 104 also may be used for storing temporary variables or other intermediate information during execution of instructions by processor 102. The system also comprises a read only memory (ROM) and/or static storage device 106 coupled to bus 101 for storing static information and instructions for processor 102, and a mass storage device 107 such as a magnetic disk drive or optical disk drive. Mass storage device 107 is coupled to bus 101 and is typically used with a computer readable mass storage medium 108, such as a magnetic or optical disk, for storage of information and instructions. The system may further be coupled to a display device 121, such as a cathode ray tube (CRT) or a liquid crystal display (LCD) coupled to bus 101 through bus 103 for displaying information to a computer user. An alphanumeric input device 122, including alphanumeric and other keys, may also be coupled to bus 101 through bus 103 for communicating information and command selections to processor 102. An additional user input device is cursor control 123, such as a mouse, a trackball, stylus, or cursor direction keys coupled to bus 101 through bus 103 for communicating direction information and command selections to processor 102, and for controlling cursor movement on display device 121. Another device which may optionally be coupled to bus 101 through bus 103 is a hard copy device 124 which may be used for printing instructions, data, or other information on a medium such as paper, film, or similar types of media. In the preferred embodiment, a communication device 125 is coupled to bus 101 through

6

bus 103 for use in accessing other nodes of a network computer system or other computer peripherals. This communication device 125 may include any of a number of commercially available networking peripheral devices such as those used for coupling to an Ethernet, token ring, Internet, or wide area network. It may also include any number of commercially available peripheral devices designed to communicate with remote computer peripherals such as scanners, terminals, specialized printers, or audio input/output devices. Communication device 125 may also include an RS232 or other conventional serial port, a conventional parallel port, a small computer system interface (SCSI) port or other data communication means. Communications device 125 may use a wireless means of data transfer devices such as the infrared IRDA protocol, spread-spectrum, or wireless LAN. In addition, communication device 125 is used in the preferred embodiment to couple the mobile playback device 212 to the client computer system 214 as described in more detail below. One other device used in the preferred embodiment is sound circuitry 130 either with attached speakers or headphones 132, or with analog audio outputs suitable for input into audio reproduction equipment such as external amplifiers and speakers, cassette adapters, etc. Sound circuitry 130 is well known in the art for playing audio files. Alternatively, sound circuitry may be a radio transmitter which transmits audio data on a predefined frequency for reception and playback by a radio receiver. Other wireless methods are possible.

Note that any or all of the components of the system illustrated in Figure 1 and associated hardware may be used in various embodiments of the present invention; however, it will be appreciated by those of ordinary skill in the art that any configuration of the system may be used for various purposes according to the particular implementation. In one embodiment of the present invention, the data processing system illustrated in Figure 1 is an IBM® compatible personal computer (PC), an Apple Macintosh® personal computer, or a SUN® SPARC Workstation. Processor 102 may be one of the 80X86 compatible microprocessors such as the 80486 or PENTIUM® brand microprocessors manufactured by INTEL® Corporation of Santa Clara, California.

The software implementing the present invention can be stored in main memory 104, mass storage device 107, or other storage medium accessible to processor 102. It will be apparent to those of ordinary skill in the art that the methods and processes described herein can be implemented as software stored in main memory 104 or read only memory 106 and executed by processor 102. This software may also be resident on an article of manufacture comprising a computer usable mass storage medium 108 having computer readable program code embodied therein and being readable by the mass storage device 107 and for causing the processor 102 to perform digital information library transactions and protocols in accordance with the teachings herein.

Digital Information Library System

Figure 2 illustrates the computer network architecture used in the preferred embodiment of the present invention. In general, the network architecture of the present invention includes a library site 250 coupled to a client site 210 via a conventional distribution network infrastructure 240. This conventional distribution network infrastructure 240 can be implemented as a standard telephone connection provided between the library site 250 and client site 210 through an Internet provider to enable data communication on the Internet over a conventional telephone network. This use of the Internet as a distribution network is well known to those of ordinary skill in the art. In an alternative embodiment having cable modem capability, communication over a conventional cable network is possible in lieu of communication over the telephone network. The cable network is typically much faster (i.e. provides a much greater bandwidth) than the standard telephone network; however, cable modems are typically more expensive than standard POTS (plain old telephone system) modems. In another alternative embodiment having conventional Integrated Services Digital Network (ISDN) capability, the distribution network 240 is accessed using an ISDN modem. Again, the ISDN network is typically faster than the POTS network; however, access to an ISDN network is generally more expensive. Cable modems and ISDN implementations are alternative communications media to the POTS implementation.

In addition, it will be apparent to those of ordinary skill in the art that other forms of networking may equivalently be supported by the present invention. For example, a wireless transmission means such as infrared or radio links may also provide the distribution network 240 described in the present application. As an alternative to the Internet, a proprietary network/bulletin board such as AMERICA-ON-LINE (AOL), or COMPUSERVE may be used.

Each of the servers at library site 250 and the client computer system 214 at client site 210 can be implemented as a computer system such as the one described above in connection with Figure 1. It will be apparent to one of ordinary skill in the art that the library server 260, authoring system 280, and authorization server 270 can be remotely located yet networked together as a distributed system using the techniques described above. In addition, the present invention allows for multiple library servers, authoring systems and authorization servers. Conversely, the servers may be implemented as separate functions of a single machine. These alternative embodiments are illustrated in Figures 4-8 and are described in more detail below.

The mobile playback device 212 is a minimally configured, low-cost, standalone mobile unit for receiving and storing digital information files or programs as downloaded by library server 260 and client computer system 214 and for playing back the digital information files or programs for a user of the mobile playback device 212. The mobile playback device 212 is temporarily removably coupled to the client computer system 214 while the download takes place.

Once downloaded, the mobile playback device 212 may be detached from the client computer system 214 and used as a standalone digital information playback device. A co-pending U.S. Patent Application titled, "Interactive Audio Transmission, Receiving and Playback System", assigned Serial No. 08/490,537, and assigned to the Audible Words Corporation of Montclair, NJ describes the details of mobile playback device 212.

In its basic form, the preferred embodiment of the present invention is a digital information library system providing selection of digital information programming on demand over a computer network. In an alternative embodiment, the digital information programming is selected via the computer network but delivered using mass storage media 241. This alternative embodiment is described in more detail below.

The digital information library is an indexed collection of digital information programming, drawing content from digital information sources such as books, daily news and entertainment feeds, conferences and educational sources, other computer systems, the host on the World Wide Web (WWW) of the Internet, and customized audio or visual image programming. Other sources of the digital information content include, but are not limited to, conference or seminar proceedings, lecture or speech materials, language lessons, readings, comedy, customized spoken digests and related, "need-to-know" business information, computer software, local sound studio material, text to speech conversion of machine readable files, pre-recorded material from magnetic tape, CD-ROM, digital audio tape, or analog cassette tape. This digital information content is input as raw digital information content to authoring system 280 shown in Figure 2. In an alternative embodiment, a raw digital information digitizer 307 is included for receiving raw input and converting the input to a digital form which can be manipulated as a digital information file.

In an alternative embodiment, the digital information comprises digitized image or graphics data used to produce visual images on a display screen or projection screen. These images may be included in the digital information retained and maintained by the library server 260.

Authoring System

Authoring system 280 is used to edit, index, compress, scramble, segment, and catalog digital information content into digital information programs in digital information files, which are stored on mass storage media 241 or on library server 260 as scrambled and compressed digital information files 262. The digital information programs are initially categorized according to traditional criteria (e.g. genre, modern fiction, mystery, adventure, romance, non-fiction, classics, self-help, science fiction, westerns, etc.). Categories associated with specific authors or publishers are also provided. Both unabridged and abridged titles are provided. In some circumstances, it may be necessary to digitize digital information content from an undigitized form. The raw information digitizer 307 is provided for this purpose. Authoring system 280 also

partitions digital information content into segments, which can be identified, searched, and skipped over if desired. All of these functions are performed by authoring system 280.

Figure 3 illustrates the authoring system 280 of the preferred embodiment. Authoring system 280 receives digital information content from a variety of conventional sources as raw digitized data. This digital information data is fed to three components of the authoring system 280 of the preferred embodiment. The digital information compressor 314 receives the raw digital data and compresses the digitized data. There are a variety of conventional techniques in existence for compressing digital data. These techniques can be optimized depending upon the type of digital data being processed. Thus, the present invention provides several compression methods and a means for the authoring system operator 305 to select between these methods based upon the category of digital information content 310 being input to the digital information compressor 314. Alternatively, the selection of compression method may be performed automatically by interpretation of the digital information content 310 itself. A compressed digital information file is output by digital information compressor 314 to scrambler 318.

The raw digital information content 310 is also fed to template header generator 312. Each digital information file maintained by the library server 260 includes other descriptive information used to identify the file's content and to provide information used to process the digital information within the file. Each digital information file includes a template header, a descrambling map, selected preview clips, and the digital information programming itself. In the preferred embodiment, the template header comprises a number of attributes corresponding to the digital information in the file. For example, the digital information may be audio information generated from the content of a book or other published work. In this example, the audio file template header contains attributes including: 1) the title of a book, volume, or medium from which the digital information content originated, 2) the legal copyright associated with the digital information content, 3) audible title(s) of the content, 4) a table of contents of the content, and 5) playback settings for appropriately playing or rendering the digital information. The table of contents contains content navigation information including but not limited to: the number of chapters, the length of the program, and information indicative of the relevant content sections. The table of contents is generated with input from authoring system operator 305 or automatically by analysis of digital information content 310. The descrambling map 322 is used to interpret the digital information after the digital information has been scrambled by scrambler 318 as described below. The preview clips 324 comprise short pre-generated portions of digital information content used to give a consumer a sense of the content of a particular digital information file. In the preferred embodiment, these previews are generated as conventional formatted files which can be directly played by sound generation circuitry 130 or rendered by other means. A digital information file can have several preview clips associated with it. The preview clips 324 are not compressed or

10

scrambled in the preferred embodiment. The template header 312 remains with the digital information file as it is transferred to the network 240 or mass storage media 241. The other descriptive information related to a digital information file is typically stored with digital information file, but is not required to be so stored.

Referring again to Figure 3, template header generator 312 generates the template header given information from a particular portion of digital information content 310. Input from Authoring System Operator 305 and Digital Information Compressor 314 may be solicited during the header generation process. The template header is provided to library server 260. Other portions of the digital information file header are provided by scrambler 318 and preview generator 323. These portions of the digital information file header are assembled into the header for a particular digital information file by library server 260. The remainder of the digital information file is filled with compressed, scrambled, and segmented digital information content.

After digital information compressor 314 has compressed the raw digital information using a selected compression method suitable for the category of digital information, the scrambler 318 scrambles the digital information. The digital information is scrambled to prevent an unauthorized consumer from using the digital information. In the preferred embodiment, scrambler 318 uses a conventional encryption method to render the data unusable. A corresponding descrambling map 322 is generated to provide a means for descrambling the scrambled digital information file. A scrambling map 316 is used by scrambler 318 to scramble the digital information file. The scrambler 318 can encrypt the entire digital information file or selected critical subsets of the digital information file. The level of scrambling can be selected depending upon the capabilities of the authoring system 280, the mobile playback device 212 and/or the anticipated software player 226 on client computer system 214. In an alternative embodiment, a proprietary digital information format is used in lieu of scrambler 318.

The scrambled digital information content is output by scrambler 318 to segmentation logic 326. Segmentation logic 326 partitions the digital information content into blocks for efficient storage in and transfer to a mobile playback device 212 or software player 226 and for efficient navigation during playback. Transport integrity data is generated and appended to the segmented digital information. In an alternate embodiment, portions of the segmentation process may take place before or after digital information compressor 314 and scrambler 318. Segmentation information may also be used in the header generation process by template header generator 312. The compressed, scrambled, and segmented digital information blocks are provided to the library server 260 by authoring system 280. Library server 260 assembles the segmented digital information blocks, the descrambling map 322, the preview clip(s) 324, and the template header 312 for a particular item of digital information content into a digital information program file or files, which are stored in a digital information program file storage area 262. Other raw digital

information content is converted into digital information files using the authoring system 280 in a similar manner.

Library Server

Referring again to Figure 2, the library server 260 is responsible for maintaining the digital information program files 262 created by the authoring system 280. In addition, the library server 260 receives requests for access to the digital information program files 262 from client computer systems 214 over network 240 and manages purchase and delivery of the selected digital information files and/or delivery of selected preview clips 324. The library server 260 includes library management software 261 for performing these library server functions and a library key 263 used for the authentication protocol described below. Library management software 261 includes processing logic for receiving and responding to client computer system 214 requests for access and/or purchase of a digital information program file 262. Upon receiving such a client request, library server 260 uses authorization server 270 to authenticate the request with client information 272 generated and maintained by library server 260 or authorization server 270. The client information 272 includes client identifiers which are used to target content for playback on individual mobile playback devices 212 or software players 226. Client information 272 may also contain client personal information, user content preferences, client billing history, player usage history, and player group lists. In an alternative embodiment, portions of client information 272 may instead be stored in server 260. Using the authorization protocol described in more detail below, the library server 260 determines if the client request can be serviced. If approved, the library server 260 accesses the digital information program file(s) or preview clip(s) requested by the client computer system 214, delivers the selected preview clip(s) or builds encrypted, targeted, and digitally signed digital information files using the authentication protocol described in more detail below, and transfers the encrypted and compressed digital information file(s) to the requesting client computer system 214 via network 240. Distributable mass storage media 241 may also be used as a delivery medium for the transfer of information to client system 214. The client computer system 214 may then independently download the selected digital information files (or a subset thereof) into the mobile playback device 212 for subsequent playback. The library server 260 also collects usage statistics on the access history of the digital information files 262 and stores this usage data into usage statistic storage area 264. The library server 260 also stores operating code segments (firmware) for the client browser 219, software player 226, and for mobile playback device 212. This operating code can be downloaded to the client computer system 214 in the same manner as digital information files are transferred. Player configuration data for playback device 212 and software player 226 is stored on the library server 260 and can be customized or updated in the same manner as digital information files and firmware are

12

transferred. Configuration data includes, but is not limited to, audio prompts, user interface options, group ID information, and information playback parameters. Player configuration data is transferred to client computer system 214, software player 226, or mobile playback device 212 as required according to client information 272.

The library server 260 interfaces with a client application program or client browser 219 executing on client computer system 214. The client browser 219 is used to make requests of library server 260 for various types of service including, but not limited to, searching the digital information files 262 for a desired program, previewing a selected preview clip associated with a digital information file 262, purchasing a selected program, requesting operating code segments or player configuration data, and downloading the purchased program or other material to the requesting client computer system 214.

The library server 260 interface with the authorization server 270 and client computer system 214 uses the unique authentication protocol and encryption protocol of the preferred embodiment of the present invention. The preferred embodiment of these protocols is described in the sections below.

Client Computer System

Referring again to Figure 2, the client computer system 214 represents a consumer or end user computer system, typically a personal computer, such as the sample system illustrated in Figure 1, with which a consumer may browse, preview, select, purchase, and take delivery of digital information content from digital information library server 260 across distribution network 240. Client computer system 214 comprises client browser software 219, a mobile device interface 221, storage for encrypted and compressed digital information files 220 downloaded from the network 240, software player 226, and segment download data 222 derived from digital information files 220 for defining the storage segments in mobile playback device 212 and for assisting in the downloading of digital information files 220 from client computer system 214 to mobile playback device 212. Client computer system 214 also includes a server public key 215 used for authenticating digital information and software files received from server 260. Client browser software 219 provides the control logic with which the client or consumer accesses and purchases titles from the digital information library 262 of library server 260. Client browser software 219 also provides control logic which requests and downloads configuration information or operating code from server 260. The client browser software 219 can be configured to perform these operations without direct human intervention. The mobile device interface 221 is a software interface used to control the transfer of control information, operating code, and digital information files from client computer system 214 to mobile playback device 212. Encrypted and compressed digital information files 220 are received by client computer system 214 from library

13

server 260 over network 240. In an alternate embodiment, distributable mass storage media 241 is used instead of network 240 to transfer information to client computer system 214. The software player 226 is a software module used to emulate the operation of mobile playback device 212 and for playing digital information files through the sound circuitry 130 and audio output device 132 of client computer system 214. Operating code and configuration information for the software player 226 can be downloaded or updated from the server 260 in the same manner as the mobile playback device 212 can be downloaded or updated. The software player 226 functionality is the equivalent of the functionality and operation of the mobile playback device 212. Thus, the use of the term "player" throughout this document generally applies to both the mobile playback device 212 and software player 226. Software players 226 are assigned unique player IDs and can be assigned group IDs that function similarly to IDs assigned to mobile playback devices 212.

Mobile Playback Device

The mobile playback device 212 converts a digital information file into sound or displayable imagery which is played through audio output means or displayed on a display device. In the preferred embodiment, the mobile playback device 212 is a minimal capability, low-cost device primarily dedicated to playing audio files or displaying visual images or text on a display device. The mobile playback device 212 is minimally configured to retain its light-weight, low cost, and readily mobile features. The preferred embodiment does not therefore include the use of a portable personal computer or laptop computer as the mobile playback device 212; because, such general purpose computing devices typically do not meet the light-weight and low cost constraints of the preferred mobile playback device 212. Such general purpose computing devices typically have unnecessary functionality, more complicated interfaces, and may suffer cost and performance penalties in comparison to the special purpose mobile playback device 212. In the preferred embodiment, the mobile playback device 212 includes a processor, memory, and an interface to client computer system 214 over which compressed digital information files 216 are received. As described in more detail below, mobile playback device 212 also includes a player ID 223, group IDs 225, and server public key 215 used for authenticating digital information and software files received from server 260 via client computer system 214. The user controls the mobile playback device 212 using buttons and knobs provided on the device. These controls are used to navigate through digital information files 216, adjust configuration data and playback parameters, or perform other functions as directed by firmware stored in playback device 212. When coupled to the player, client computer system 214 or other electronic devices can solicit user input from these controls. In an alternative embodiment, a set of additional user controls is provided on a remote control unit that is coupled to the player via a wired or wireless connection. Digital information output may be provided via a headphone jack, on board speaker, or wireless transmitter to a

14

separate wireless receiver with speakers or headphones. Audio level can be adjusted with a volume knob. A wireless transmitter may contain an adjustment knob to adjust the transmission frequency or other transmission parameters. Visual information output is provided via LCD display, LED display, or outputs to a standard visual display device. The mobile playback device 212 contains a limited quantity of non-volatile memory, RAM, and ROM. Digital information content, configuration data, and operating code are stored in the memory space of the mobile playback device 212. Configuration data includes but is not limited to: public and private IDs, content playback parameters, and user interface parameters. The use of non-volatile memory allows portions of the digital information content, configuration data, and firmware to be updated via download. Both digital information content and firmware (operating software) is stored in this memory device. Portions of the firmware and configuration information are stored permanently in a read only memory (ROM). An internal memory allocation method is used to track the content of mobile playback device 212 memory. This allocation method, in conjunction with segment navigation data 218, also provides the means for locating desired digital information, program, configuration data, or header data resident in the mobile playback device 212 memory. The mobile playback device 212 includes an interface to the client computer system 214 through which the mobile playback device 212 receives compressed digital information files 216, software updates, and configuration changes from client computer system 214.

Downloading Digital Information Content, Software Updates, or Configuration Information From the Library Server to the Client Computer System

The client browser software 219 of client computer system 214 operates in cooperation with library management software 261 of library server 260 and the firmware resident on the mobile playback device 212 to provide a means by which a consumer may browse, preview, select, purchase, and take delivery of selected digital information content from digital information library server 260 across distribution network 240. The digital information content is typically downloaded to the client computer system 214 at the time of purchase, but it is possible to download digital information content either, 1) sometime after the purchase, or 2) multiple times after an initial purchase. The client browser 219 can be configured to download content to client computer system 214 without user intervention. In addition, portions of the client computer system 214 software itself or mobile playback device 212 resident software/firmware may be downloaded or updated from library server 260. The mobile playback device 212 resident software/firmware is downloaded through client computer system 214. If library server 260 has an updated or more recent copy of client computer system 214 software or mobile playback device 212 software/firmware, the library server copy is downloaded to replace the outdated version of the corresponding client computer system 214 software or mobile playback device software 212.

The software is encrypted, scrambled, and digitally signed in a manner similar to the scrambling and delivery of the digital information files. Changes to the ID list, audio prompts, and other configuration data for playback device 212 can be downloaded in a manner similar to the downloading of software updates from library server 260.

The preferred embodiment utilizes three authentication processes to protect the transfer of information from server 260 to client system 214 and playback device 212. First, a point-to-point authentication protocol is performed whereby the library server 260 must verify that the requesting client computer system 214 is an authorized client and the client computer system 214 must verify that the library server 260 is an authorized provider. Secondly, a targeting protocol is performed whereby the library server 260 utilizes a set of identifiers (i.e. player IDs) for mobile playback devices 212 authorized to receive the selected download data from library server 260. The mobile playback device identifiers are provided by client computer system 214 or are referenced from user profiles stored on library server 260. In the targeting process, library server 260 formats and downloads data that can only be read by mobile devices 212 with these identifiers. Thirdly, a library server digital signature is appended to the downloaded data for use by the mobile playback device 212 to verify that the downloaded data was originated by an authorized library server. These three authentication processes of the present invention are described in detail in the following sections.

Point-to-Point Authentication Protocol

The library server 260, client computer system 214, and mobile playback devices 212 each have a unique verification sequence which is used to verify the authenticity of another system. In communications between library server 260 and client system 214, both systems alternately act to (1) request verification of the other system and (2) provide an authenticating response to a verification request. Communication between mobile devices 212 and client computer system 214 use a similar authentication protocol, as well as real-time communication between mobile devices 212 and library server 260 via client system 214. This verification sequence comprises a pre-defined set of bit streams or data structures which are sent by the requesting system (i.e. the system requesting verification) to the receiving system being authenticated (i.e. the respondent) in a point-to-point transmission. The receiving system must respond to the verification sequence in a pre-defined manner by sending particular response bit streams or data structures to the requesting system. If the appropriate response data from the respondent is received by the requesting system, the system being verified is considered an authorized system. Conversely, the system being verified is considered unauthorized if the appropriate response data is not received by the requesting system prior to a pre-defined time-out period. Both systems begin communication by acting as requesters and respondents in separate verification cycles. Upon completion of these

point-to-point authentication cycles, further client/server processing only continues if both systems deem each other to be authorized systems.

In an alternate embodiment, point-to-point authentication is used in a subset of the communications among library server 260, client computer system 214, and mobile playback devices 212. In another embodiment, point-to-point authentication is not used and system security rests on the use of targeting and/or digital signature authentication.

Targeting Protocol

The targeting protocol of the present invention is a means and method for limiting the playback of digital information content, the adjustment of player configuration data, and the download of player operating code to a specified player 212/226 or a specified set of mobile playback devices 212. Each player 212/226 contains a unique player ID 223. The player ID 223 comprises a public player ID and a private player ID. The public player ID is a unique identifier and serves as a serial number for player identification. The private player ID is used to target data for individual mobile playback devices 212. Private player IDs are never sent through any communications link or network path, except during installation. In the preferred embodiment, private player IDs should be sufficiently diverse, but need not be unique.

Mobile playback devices 212 may be logically grouped together using a Group ID. Digital information content, software, or configuration data changes may be targeted to a group of mobile playback devices 212 defined by a group ID. Each player 212/226 includes memory space for storage of one or more group IDs 225 of which the particular player 212/226 is a member. Each group ID includes a public portion and a private portion, each of which is equivalent to the public and private player IDs, respectively. Each group is identified by a uniquely valued public ID that is not shared with other player or group IDs. Digital information content, software, or configuration data can be targeted to a particular group ID in the same way as it would be targeted for a specific player ID. Mobile playback devices 212 in the same group share the same Group ID. A particular Group ID is pre-defined as the global group to which all mobile playback devices 212 are a member. Mobile playback devices 212 may be members of more than one group. A particular player 212/226 is added to a new group by appending the new group ID to the set of group IDs 225 maintained in the particular player 212/226. The new group ID is appended after the server 260 provides a public group ID and a group key to the player 212/226 via client computer system 214. The player 212/226 generates a private group ID from the combination of the group key and the mobile playback device's 212 private player ID. As with the private player ID, the private group ID is never sent through any communications link or network path, except during installation. In an alternative embodiment, players receive the group private ID directly or by combining the group key with the players public ID or other known numeric value. In another

17

alternative embodiment, the private group ID is not used in the targeting process and is not transferred to the player. The group assignment process may be restricted to using real-time communications between server 260 and the player via client system 214, or it may take place sometime after group assignments have been downloaded to client system 214. Having described the player IDs and group IDs defined in the present invention, the use of these IDs in the targeting protocol is described next.

Library server 260 includes a player ID table 266 as shown in Figure 2. Player ID table 266 includes a storage area for private IDs and public IDs. The private IDs are pre-loaded into player table 266 when a new mobile playback device is installed into the system or when a new group is established. In another embodiment, ID table 266 is a mathematical function which converts group or player public IDs. Public player and group IDs are sent by a client computer system 214 to the server 260 when the client computer system 214 desires to target a particular player 212/226 or set of mobile playback devices 212 to a particular specified digital information, software content, or configuration data selection. Digital information selection is made from the files 262 stored on library server 260. Software or configuration data selection is made from files stored on server 260 or from data generated upon request by server 260. Software content and configuration data is prepared and scrambled in a manner similar to the authoring process for digital information content. Once an association is made by client computer system 214 between a set of targeted public IDs and the associated data to be transferred from server 260, library server 260 creates a targeted header for the selected files. The library management software 261 consults the public ID to private ID table 266 to locate the corresponding targeted private ID(s). The targeted header comprises a combination of the descrambling map 322 from the selected files with the private player IDs corresponding to the targeted mobile playback devices 212. The descrambling map 322 is thereby encrypted using the secret IDs of the targeted mobile playback device(s) 212. This targeted header is linked with the corresponding digital information or software content of the selected file in a network transport ready data block. A digital signature is applied to the data block as described below in connection with the data signature protocol. Transport integrity data (such as the use of checksums or cyclic redundancy check) is applied to the data block and the data block is sent to the client computer system 214 via network 240. Because the data block can only be unscrambled using the corresponding descrambling block 322 in its header and because the descrambling block 322 was combined (i.e. encrypted) with a private ID known only by the targeted mobile playback device(s) 212, only the targeted mobile playback device(s) 212 will be able to unscramble and read the data block. The selected digital information, software content, and configuration data is thereby targeted to a particular set of mobile playback devices 212.

For small groups of mobile playback devices 212, each targeted header of a digital

information file may contain a plurality of descrambling maps, each associated with a different player 212/226. In this manner, multiple mobile playback devices 212 can read a single file 220 stored on the client computer system 214.

A person of ordinary skill in the art will note that alternative methods of targeting exist. In an alternative embodiment, library server 260 uses the targeted recipient's private player 212/226 identifier or the targeted group's private group identifier to generate scrambling map 316. Descrambling map 322 is not stored with the file as it is already known by the recipient player or group. This method targets content to a single player 212/226 or group and achieves the identical result of preventing unauthorized playback of content.

In another alternative embodiment, library server 260 does not scramble the digital information content or uses a known key to scramble the digital information content. In this embodiment, descrambling map 322 is unnecessary and is not stored with the file. Either the public or private player 212/226 identifier can be stored in the header for targeting identification purposes. Upon receipt of data from library server 260, the player 212/226 checks if its player 212/226 identifier or group identifier is included in the header. This method assumes unmodified mobile playback devices 212 and achieves the identical result of preventing unauthorized playback of content.

In another alternative embodiment, the player IDs for the targeted mobile playback devices 212 are sent to the library server 260 by the client computer system 214 when the user registers with the library server 260 to obtain the user's client ID. In this alternative embodiment, these player IDs are stored on the library server 260 in a user profile. In this embodiment, the library server 260 manages the player IDs for the targeted mobile playback devices 212.

Digital Signature Protocol

The third authentication protocol used in the present invention is the digital signature protocol. For selected data blocks generated by library server 260 and downloaded to a client computer system 214, library server 260 uses its private library key 263 to apply a digital signature to the data block. The digital signature comprises a known bit string or data pattern which is combined with the data in data blocks that are downloaded from library server 260 to client computer system 214. The library server 260 may perform this operation on all the data blocks or a selected subset of the data blocks. After a data block is downloaded to a player 212/226 through a client computer system 214, the player 212/226 can retrieve the digital signature applied by the library server 260 using a public server key known to the player 212/226. The player 212/226 can thereby verify that the data block originated with an authorized library server 260. The public server key is also known to client computer system 214, which can perform the identical operation to verify that the data block originated with an authorized library

19

server 260. In this embodiment, library server 260 performs signatures on the content. A person of ordinary skill in the art would realize that the signatures may also be performed on the digital information by authoring system 280. The signatures may also be performed in a multiple step process shared by authoring system 280 and library server 260.

In an alternate embodiment, digital signatures are applied to downloaded material by a trusted client computer system 214. In another alternate embodiment, digital signatures are not applied to downloaded material and system security rests on the use of targeting and/or point-to-point authentication.

Downloading Digital Information Content, Software Updates, or Configuration Information From the Client Computer System to the Mobile Playback Device

In a first step, the client computer system 214 and the mobile device use the point-to-point authentication protocol described above to verify that an authorized mobile playback device 212 is communicating with an authorized client computer system 214. If this is the case, the mobile playback device 212 transmits its memory map to the client computer system 214 via the mobile device interface 221. A table of contents defining the available digital information files 220 and player configuration profiles resident in client computer system 214 is displayed along with the mobile playback device 212 memory map for a user of client computer system 214. The user selects which files 220 of client computer system 214 should replace portions or segments of specified mobile playback device 212 memory as defined by the mobile playback device 212 memory map. Alternately, client browser 219 can be configured to automatically perform this selection process. In either case, the user is prevented from selecting digital information content larger than the available memory of playback device 212. In addition, control software and/or configuration data for playback device 212 may be automatically updated by client computer 214. The specified digital information files 220, associated headers, operating code, or configuration data are thereafter downloaded into mobile playback device 212 memory. The mobile playback device 212 uses checksums to verify the integrity of the download. The mobile playback device 212 uses the server public key 215, the header, and the digital signature to authenticate the download as described above. The header descrambling map is used by targeted mobile playback devices 212 to unscramble the downloaded data. In other embodiments, mobile playback device 212 may unscramble the downloaded data and/or decompress the downloaded data before authenticating the signature. Each segment of the digital information content may be independently authenticated and validated using any of the techniques described above. Digital information prompts on the mobile playback device 212 guide the user to the desired portion of the

downloaded digital information content as specified by the table of contents residing in the header of the downloaded data. The user may preview selected portions of the digital information content by selecting a preview option. The preview option plays a predetermined portion of a selected digital information program. Upon selection of a particular digital information program, the selected digital information program is played for the user after the mobile playback device 212 converts the digital information content into sound or displayable imagery which is played through an audio output means or displayed on a display device.

The software player 226 of client computer system 214 may also receive digital information content in approximately the same form as the digital information content downloaded to the mobile playback device 212; however, the digital information content for the software player 226 does not need to be downloaded to the software player 226. The software player 226 has direct access to the digital information content; because, it shares memory and/or disk storage space with the client computer system 214. Therefore, there are no downloading or memory map concerns. In the same manner as the mobile playback device 212, the software player 226 performs digital signature verification, verification of checksums, and receiving targeted information. In an alternative embodiment, software player 226 may use a communication protocol similar to that of mobile playback device 212 when receiving digital information content, configuration information, and dynamically downloaded software.

Figure 4 illustrates an alternative embodiment of the present invention. As shown in Figure 4, authoring system 280 can support a plurality of library servers 260. Each library server can be configured to support a specific type of digital information content. In the same manner described above, the client computer systems 214 access network 240 and obtain digital information content from any of the library servers 260 after performing the authentication process described above. Authorization server 270 is provided for this purpose. The configuration illustrated in Figure 4 provides a more distributed architecture thereby dispersing the load across several server platforms. A site with many client computer systems 214 may have its own library server 260 to reduce demand on network 240. This architecture scales well as the number of client computer systems 214 grows and the content provided by the library server 260 grows.

Figure 5 illustrates another embodiment of the present invention except the library server 461 has been implemented as a plurality of separate processes or tasks 460 running concurrently on a single library server platform 461. Each library server process 460 services requests for access to its corresponding portion of the digital information content. This content is created using authoring system 280 in the manner described above. The authorization server 270 is used to validate the links between the client computer systems 214 and the library server processes 460. The configuration illustrated in Figure 5 is advantageous in that the convenience of a single server is maintained while the scalability of multiple libraries is also supported.

21

This concept can also be used for the authoring and authorization servers 280 and 270, respectively. As shown in Figure 6, the authoring system 280 and the authorization server 270 is implemented on a single platform 685 as authoring process 680 and authorization process 670. These processes perform the same functions as described above, except the implementation provides the convenience of a single server and the scalability of multiple processes for the authoring and authorization tasks.

Figure 7 illustrates yet another alternative embodiment wherein the client computer systems 214 include a local library 710. The local library 710 provides a local storage area and library access control functionality which provides access to a subset of the archived digital information from library server 260. In the manner described above, the user of a client computer system 214 identifies the titles or items of digital information in library server 260 that the user wishes to access. In the preferred embodiment, these content selections are transferred to a client storage area 220 (as shown in Figure 2) for subsequent downloading to mobile playback device 212. The embodiment shown in Figure 7 expands upon the client storage area 220 and creates a local library 710. The local library 710 is used for storage of selected content; but also for searching, sorting, categorizing, and abstracting the locally stored content. The local library 710 allows a client computer system 214 to maintain a small subset of the full library which may be used to create custom collections of content in a variety of user selected configurations. Client systems 214 may be permitted to access the contents of local libraries 710 on other client systems 214. In a related alternate embodiment, library server processes 460 may also reside on selected client systems 214. This embodiment allows client systems 214 to browse and purchase content that is scrambled, targeted, and delivered from library server process 460 executing on a locally positioned client system 214. By maintaining the library locally, a portion of the network access and transfer overhead is eliminated.

Figure 8 illustrates another alternative embodiment of the present invention wherein the client computer system 214 is eliminated and the mobile playback device 212 is connected directly to the network 240 through network interface 810. In the preferred embodiment, the mobile playback device 212 is a ~~minimal capability device primarily dedicated~~ to playing audio files or displaying visual images or text on a display device. The mobile playback device 212 is minimally configured to retain its light-weight, low cost, and readily mobile features. The preferred embodiment does not therefore include the use of a portable personal computer or laptop computer; because, such devices typically do not meet the light-weight and low cost constraints of the preferred mobile playback device 212. However, the minimal mobile playback device 212 may be augmented to add network interface 810 which comprises a conventional hardware connector, hardware buffers and controllers, and firmware support for a particular conventional network protocol. For example, the mobile playback device 212 may be augmented with an integrated

22

modem that includes a telephone jack with which the playback device may be connected to a telephone network. It will be apparent to those of ordinary skill in the art that network interface 810 may be implemented in a low cost and light-weight device such as mobile playback device 212. Because the client system browser 219 would not be available in the alternative embodiment shown in Figure 8, a simplified user interface may be provided in firmware or other non-volatile memory of mobile playback device 212 with which the user may select items of digital information for download and playback from library server 260. As described above, the authentication process to validate the link between the mobile playback device 212 and the library server 260 must also be performed prior to user access to the library server 260 content. Alternatively, a client system 814 coupled to network 240 may be provided to support client browser 219 and thereby enable selection of items of digital information for download and playback from library server 260 directly to any of the mobile playback devices 212. Client systems 814 may support local storage of digital information, software, and configuration data in a form similar to storage space 220 or local library 710. In addition, a more simplified implementation of network interface 810 may be designed to communicate via network 240 to client system 814 instead of library server 260.

In another alternative embodiment of the present invention, digital information programming selections are made using the client computer system 214 and library server 260 as described above; however, the selections are delivered on mass storage medium 241. Mass storage medium 241 represents any of a variety of conventional mass storage technologies including CD-ROM, PCMCIA cards, DVDs, floppy disks, removable hard drives, digital magnetic tape, optical cards, flash memory or other optical, magnetic, electronic, or semiconductor memory devices. Upon selection by a user of a client computer system 214, selected programming is targeted and scrambled as described above and transferred to a selected mass storage medium 241 and mailed, hand-delivered, or held for pickup by the user. Once the user takes physical possession of the selected mass storage media 241, the selected programming may be read from the mass storage medium 241 by the client browser 219 and thereafter transferred to the mobile playback device 212 as described above. Figure 9 illustrates another embodiment of the system that does not include the use of client computer 214 to transfer data to mobile playback device 212. Kiosk 910 consists of a computer system such as the one described above in Figure 1. Kiosk 910 is a publicly accessible unit that can perform browse, content purchase, and download functions in a manner equivalent to a client computer system 214. The kiosk 910 is special because it contains its own library server for fast local access and download of content. Kiosk 910 contains a mobile device interface 221, a special version of client browser 219, and local library server process 460. Kiosk library server process 460 has local storage of scrambled and compressed digital information files 262. These compressed information files 262 originate from remote authoring system 280 and may be delivered via physical transport of mass

23

storage media 241 or via distribution network 240. A customer operates client browser 219 to browse, select, and purchase digital information files that are delivered to the customer's mobile playback device 212. Authentication, targeting, and download processes are performed within the kiosk by library server process 460 that is connected to remote authorization server 270 over network 240. In a related embodiment, figure 7 shows a client system 214 with local library 710 that can be converted into a kiosk with functionality similar to kiosk 910. In this system, a special version of client browser 219 provides the same user functionality as the previous kiosk embodiment.

An alternate embodiment of the system uses a common communication network to connect all system components. In Figure 10, network 240 is directly coupled to client system 214 and 814, network interface(s) 810, library server(s) 260, authorization server 270, and authoring system(s) 280. One of ordinary skill in the art will realize that network 240 can also be segmented into a number of independent networks or communication links without changing the functionality of the system.

Thus, a method and apparatus for implementing a computer network based digital information library system employing authentication and encryption protocols for the secure transfer of digital information library programs, software, and configuration data to a client computer system and a mobile digital information playback device removably connectable to the client computer system is disclosed. Although the present invention has been described with respect to specific examples and subsystems, it will be apparent to those of ordinary skill in the art that the invention is not limited to these specific examples or subsystems but extends to other embodiments as well. The present invention includes all of these other embodiments as specified in the claims that follow.

CLAIMS

We claim:

1. A computer based library and information delivery system for accessing and obtaining selected digital information files, said library and information delivery system comprising:

a library server having a plurality of digital information files;

a client computer system coupled to said library server over a network; and

a mobile device removably connectable to said client computer system, said client computer system including logic for requesting a download of a selected one or more of said digital information files from said library server, said client computer system further including logic for downloading said selected one or more of said digital information files to said mobile device.

2. The library and information delivery system as claimed in Claim 1 further including an authoring system coupled to said library server for generating or modifying said plurality of digital information files.

3. The library and information delivery system as claimed in Claim 1 wherein said plurality of digital information files includes audio files, spoken audio files, visual image files, text files, video files, multimedia files, operating code files, or configuration information files.

4. The library and information delivery system as claimed in Claim 1 wherein said library server further includes library management software for interfacing with said client computer system and said plurality of digital information files.

5. The library and information delivery system as claimed in Claim 1 wherein said client computer system further includes a client browser for interfacing with said library server and for making selections of one or more of said digital information files from said library server.

6. The library and information delivery system as claimed in Claim 1 wherein said client computer system further includes a player for tangibly playing said selected one or more of said digital information files on said client computer system.

7. The library and information delivery system as claimed in Claim 1 wherein said mobile device further includes a means for tangibly playing said selected one or more of said digital information files downloaded from said client computer system.

8. The library and information delivery system as claimed in Claim 1 further including an authorization server coupled to said library server for authorizing access to said plurality of digital information files by said client computer system.

9. The library and information delivery system as claimed in Claim 1 wherein said library server is a software process running on several computer systems.

10. The library and information delivery system as claimed in Claim 2 wherein said library server and said authoring system run on different computer systems.

11. The library and information delivery system as claimed in Claim 8 wherein said library server and said authorization server run on different computer systems.

12. The library and information delivery system as claimed in Claim 1 further including an authoring system coupled to said library server for generating or modifying said plurality of digital information files, said library and information delivery system further including an authorization server coupled to said library server for authorizing access to said plurality of digital information files by said client computer system, said library and information delivery system running on a single computer system.

13. The library and information delivery system as claimed in Claim 1 further including an authoring system coupled to said library server for generating or modifying said plurality of digital information files, said library and information delivery system further including an authorization server coupled to said library server for authorizing access to said plurality of digital information files by said client computer system, said authoring system and said authorization server running on a different computer system than said library server.

14. The library and information delivery system as claimed in Claim 1 wherein said client computer system further includes a local library for local storage of a selected portion of said plurality of digital information files.

15. The library and information delivery system as claimed in Claim 1 wherein said mobile device further includes a network interface for direct communication with a network without the aid of a client computer system.

16. The library and information delivery system as claimed in Claim 1 wherein said logic for downloading further includes logic for limiting said download based on available memory of said mobile device.

17. The library and information delivery system as claimed in Claim 1 wherein said logic for downloading further includes logic for performing authentication on each segment of said digital information files downloaded to said mobile device.

18. The library and information delivery system as claimed in Claim 1 wherein said client computer system further includes logic for previewing said digital information files prior to being downloaded to said mobile device.

27

19. The library and information delivery system as claimed in Claim 1 further including authentication logic for authenticating access to said library, said authentication logic including a means for performing a point-to-point authentication protocol.

20. The library and information delivery system as claimed in Claim 1 further including authentication logic for authenticating access to said library, said authentication logic including a means for performing a targeting authentication protocol.

21. The library and information delivery system as claimed in Claim 1 further including authentication logic for authenticating access to said library, said authentication logic including a means for performing a digital signature authentication protocol.

22. In a computer based library and information delivery system, said library and information delivery system including a library server having a plurality of digital information files, a client computer system coupled to said library server over a network, and a mobile device removably connectable to said client computer system, a method for accessing and obtaining selected digital information files comprising the steps of:

requesting a download of a selected one or more of said digital information files from said library server; and

downloading said selected one or more of said digital information files to said mobile device.

23. The method as claimed in Claim 22 further including a step of generating or modifying said plurality of digital information files.

24. The method as claimed in Claim 22 wherein said plurality of digital information files includes audio files, spoken audio files, visual image files, text files, video files, multimedia files, operating code files, or configuration information files.

25. The method as claimed in Claim 22 further including a step of activating library management software for interfacing with said client computer system and said plurality of digital information files.

26. The method as claimed in Claim 22 further including a step of interfacing with said library server and for making selections of one or more of said digital information files from said library server.

27. The method as claimed in Claim 22 further including a step of tangibly playing said selected one or more of said digital information files on said client computer system.

28. The method as claimed in Claim 22 further including a step of tangibly playing said selected one or more of said digital information files downloaded from said client computer system.

29. The method as claimed in Claim 22 further including a step of authorizing access to said plurality of digital information files by said client computer system.

30. The method as claimed in Claim 22 further including the steps of generating or modifying said plurality of digital information files, and authorizing access to said plurality of digital information files by said client computer system, said library and information delivery system running on a single computer system.

31. The method as claimed in Claim 22 further including a step of locally storing a selected portion of said plurality of digital information files.

29

32. The method as claimed in Claim 22 further including a step of directly communicating with a network without the aid of a client computer system.

33. The method as claimed in Claim 22 further including a step of limiting said download based on available memory of said mobile device.


34. The method as claimed in Claim 22 further including a step of performing authentication on each segment of said digital information files downloaded to said mobile device.

35. The method as claimed in Claim 22 further including a step of previewing said digital information files prior to being downloaded to said mobile device.

36. The method as claimed in Claim 22 further including a step of performing a point-to-point authentication protocol.

37. The method as claimed in Claim 22 further including a step of performing a targeting authentication protocol.

38. The method as claimed in Claim 22 further including a step of performing a digital signature authentication protocol.

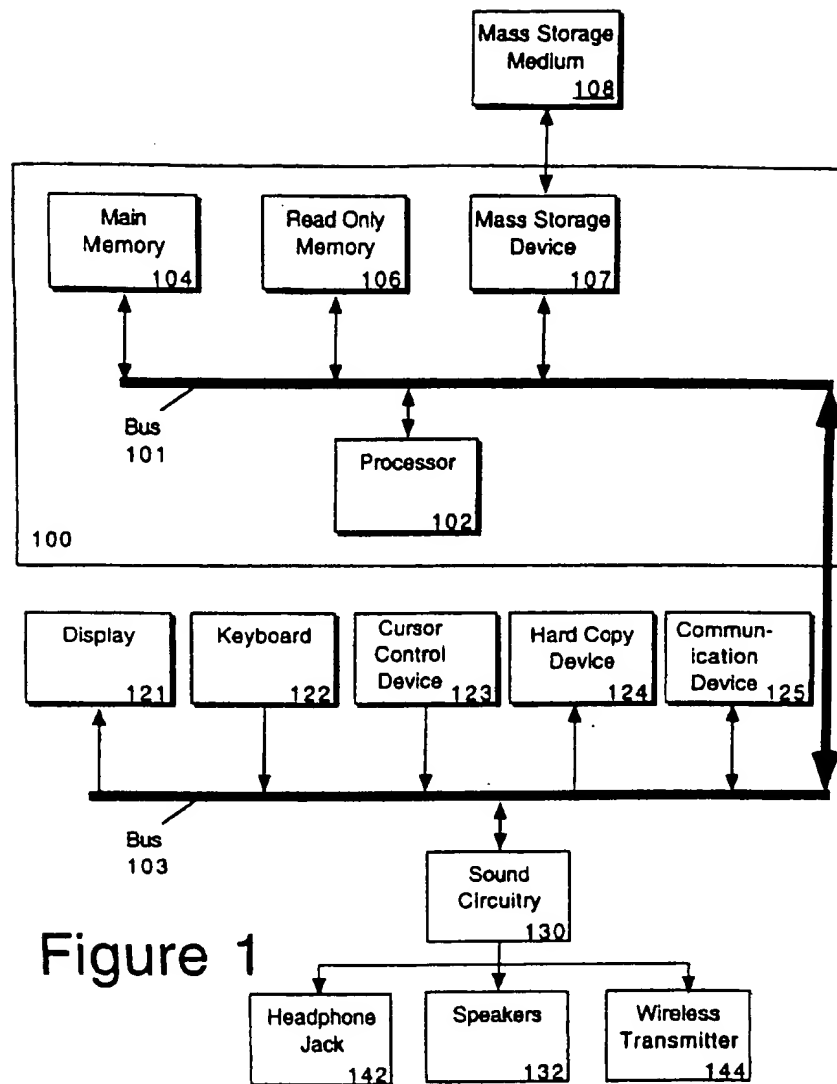

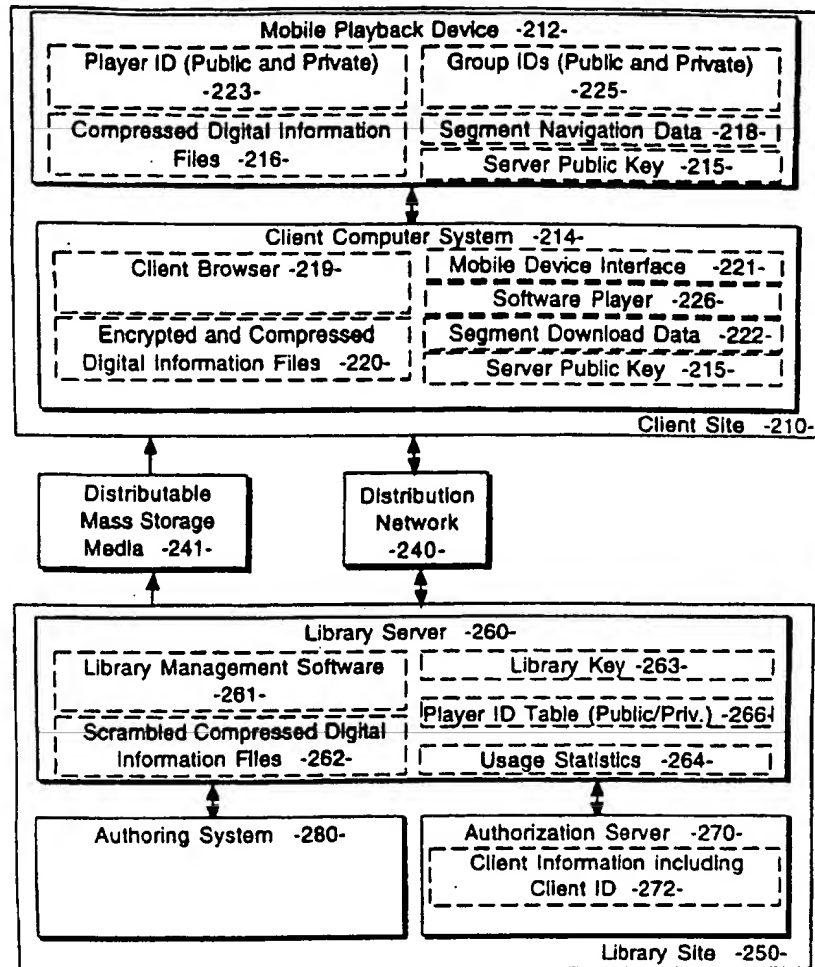


Figure 2

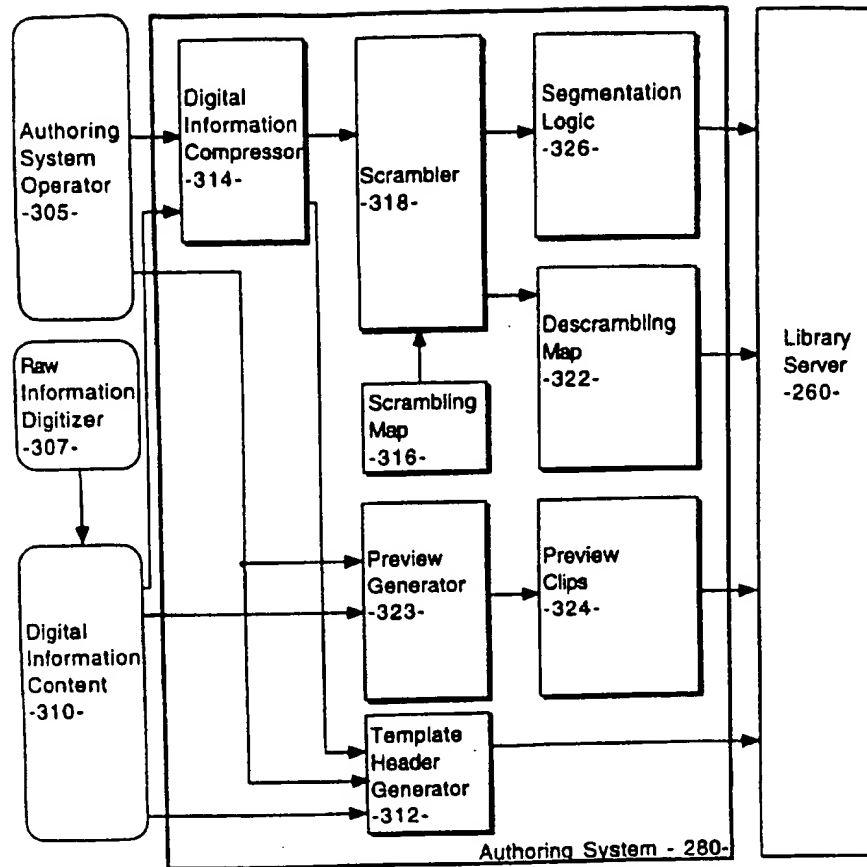


Figure 3

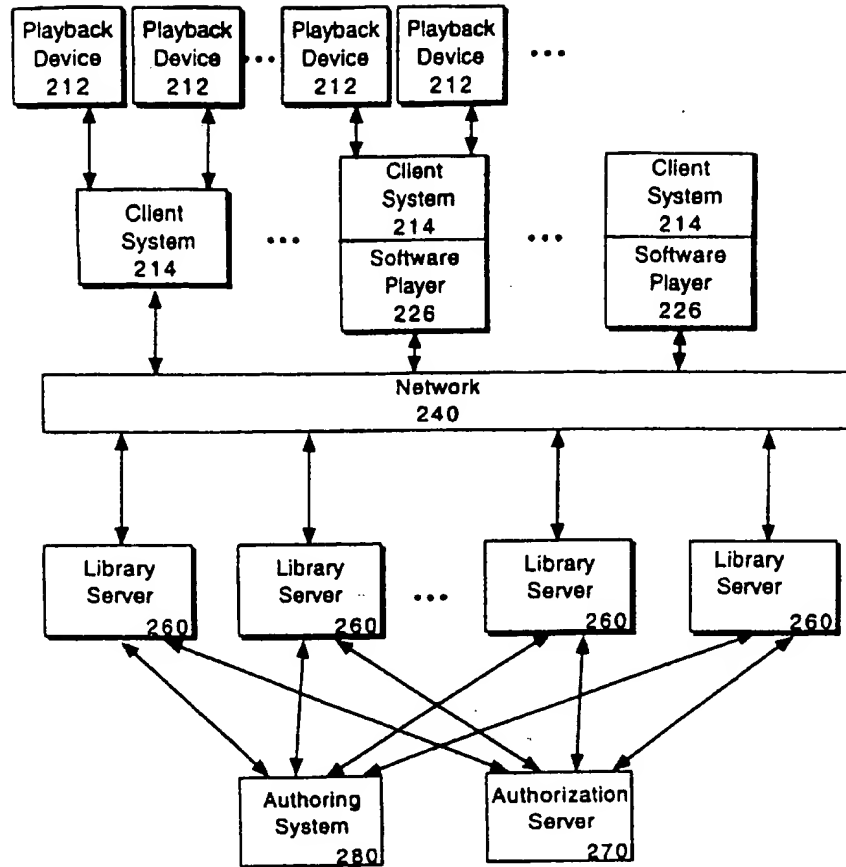


Figure 4

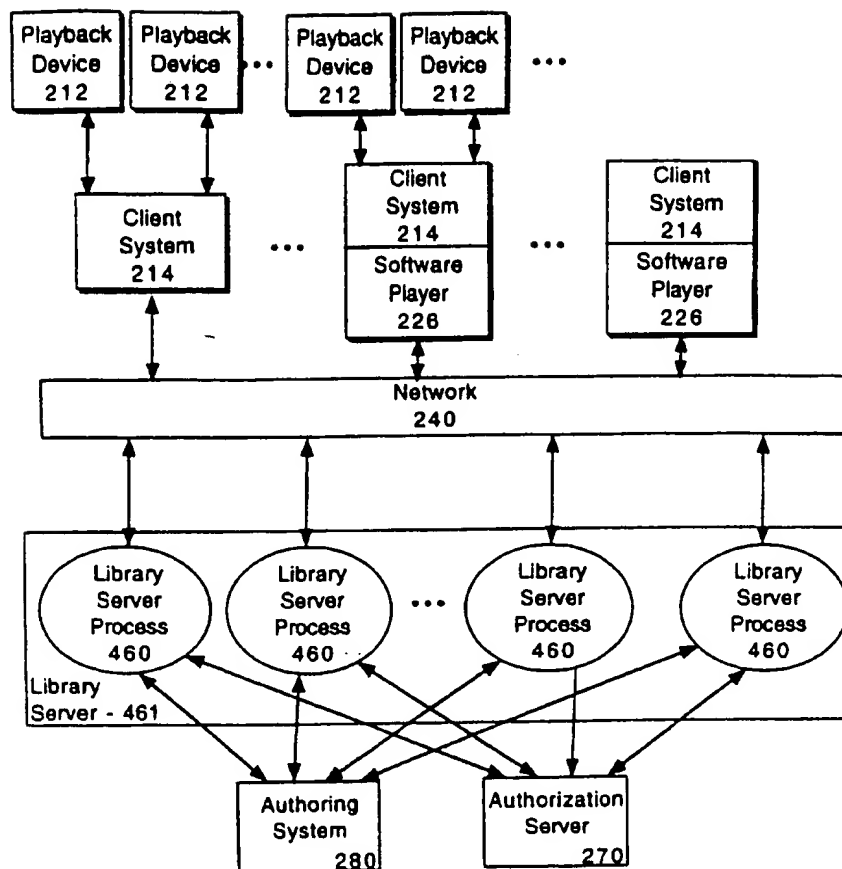


Figure 5

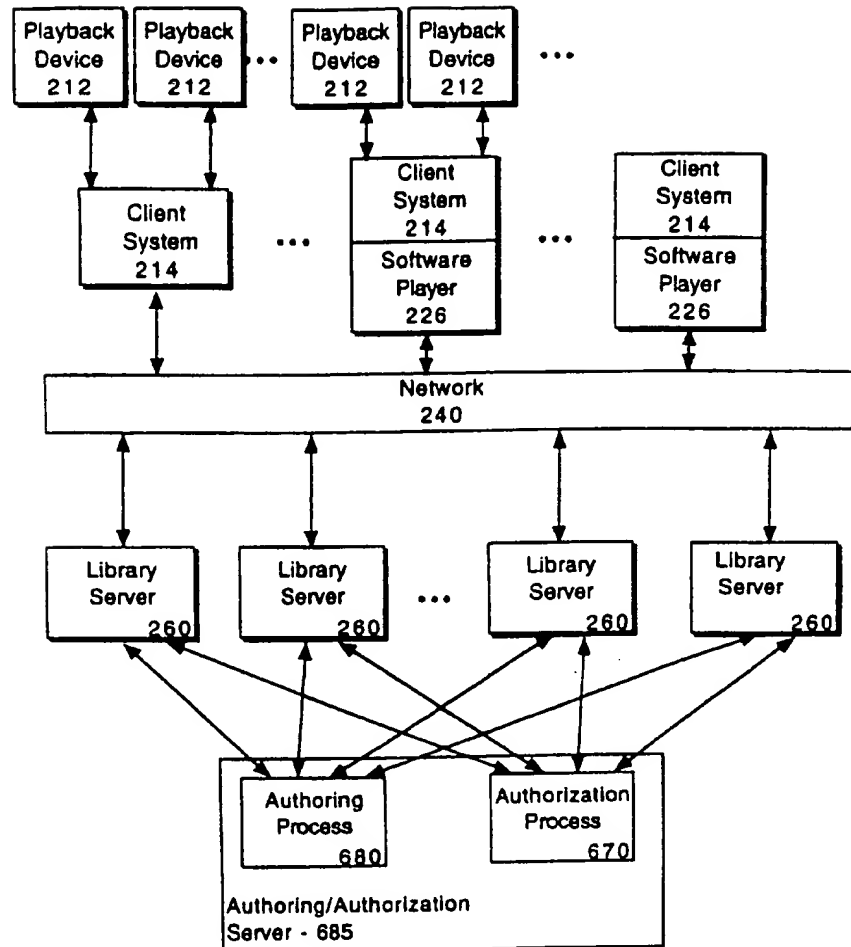


Figure 6

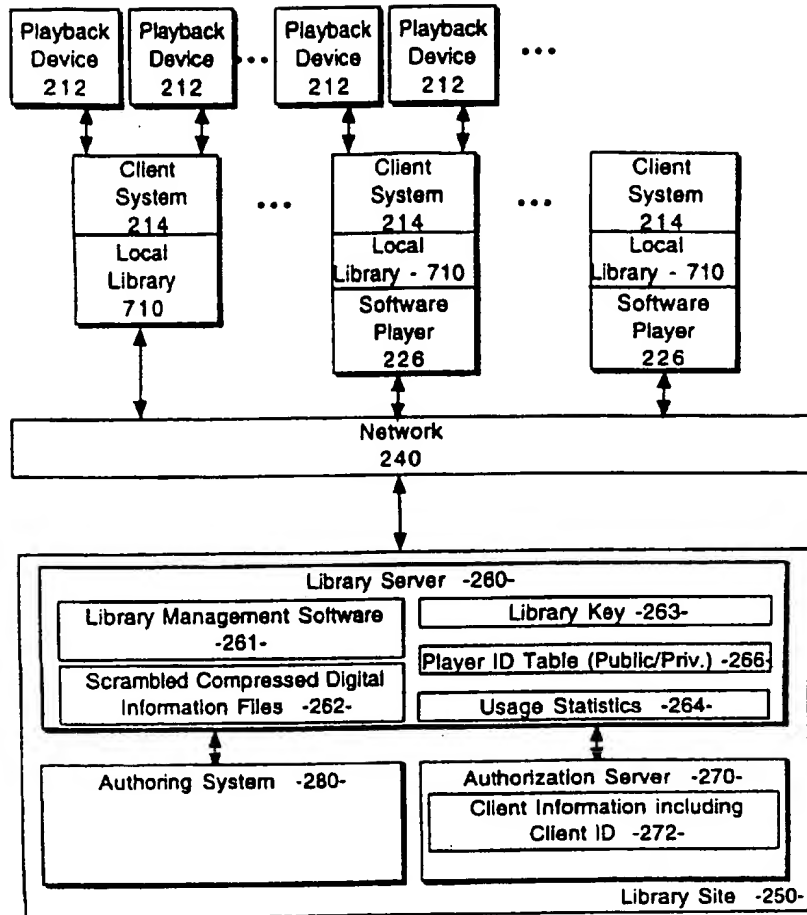


Figure 7

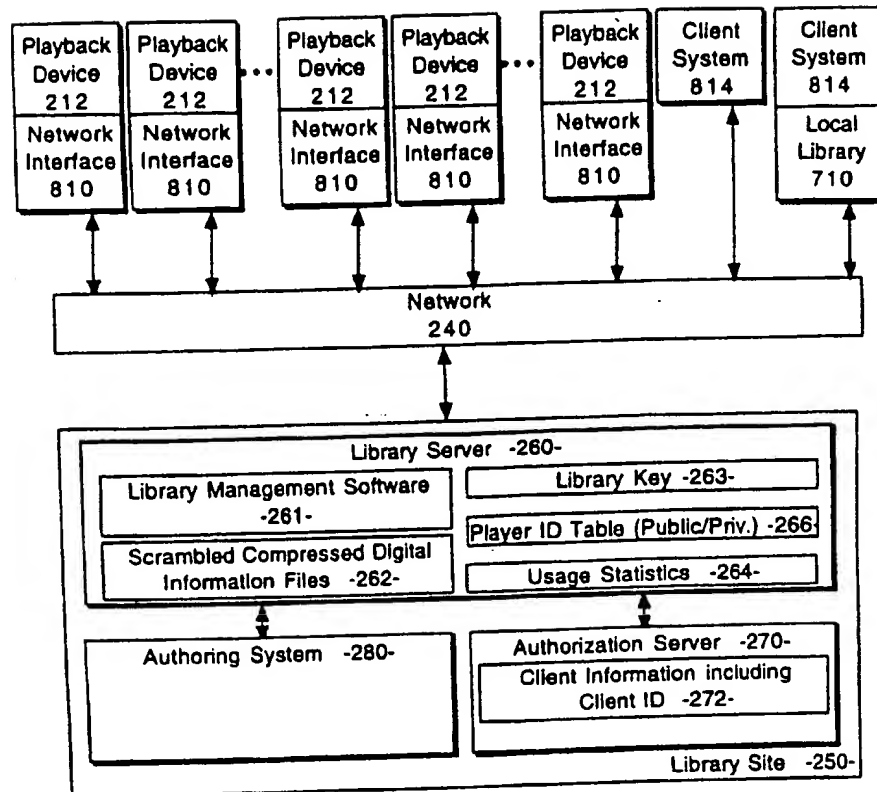


Figure 8

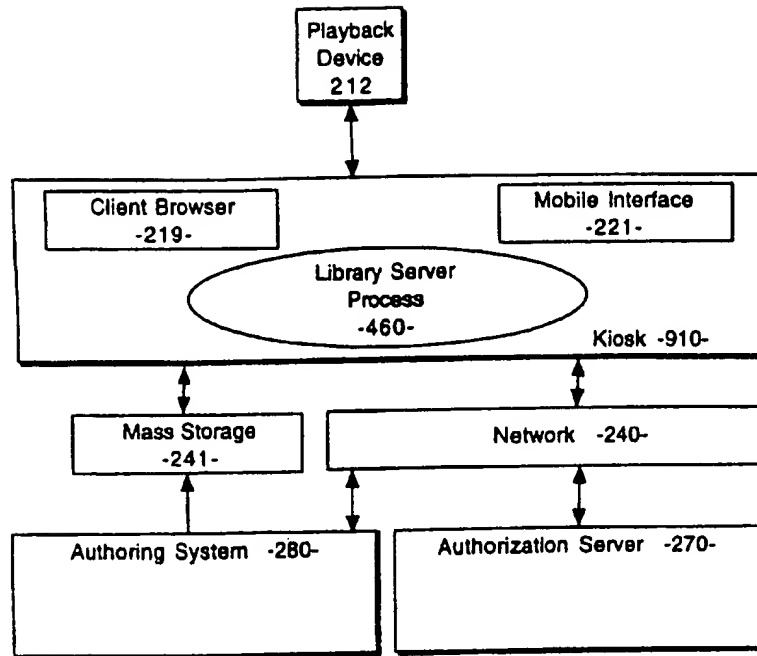


Figure 9

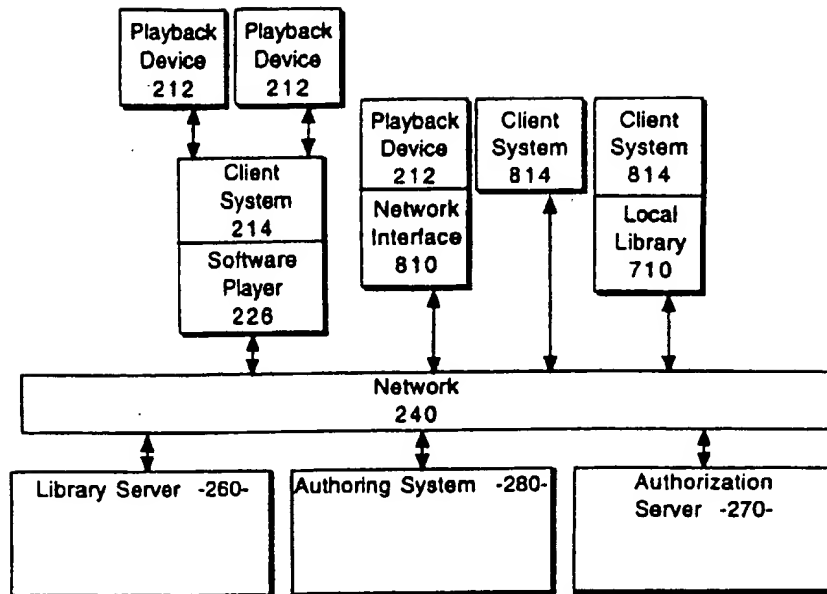


Figure 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/16184

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : G06F 13/00; H04M 11/00 US CL : 395/200.47, 200.49; 705/26 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 395/200.31, 200.32, 200.47, 200.48, 200.49; 345/327, 156, 169; 705/26, 27 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Please See Extra Sheet.		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,440,336 A (BUHRO et al.) 08 August 1995, col.4 lines 49-60.	1-38
Y,P	US 5,634,080 A (KIKINIS et al.) 27 May 1997, fig.47, 48	1, 22
Y,P	US 5,579,471 A (BARBER et al) 26 November 1996. col.3 lines 39-68.	5-9 18, 25-28
A	RAMANATHAN ET AL. "Architectures for personalized multimedia", IEEE Multimedia, 1994, all	1-38
Y	DESMEDT ET AL. "Multi-receiver / Multi-sender network security", INFOCOM '92, p.2045-2054	19-21, 35-38
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *B* earlier document published on or after the international filing date *L* document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (to specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *Δ* document member of the same patent family	
Date of the actual completion of the international search 25 NOVEMBER 1997		Date of mailing of the international search report 30 JAN 1998
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized Officer DUNG DINH Telephone No. (703) 305-9600

Form PCT/ISA/210 (second sheet)(July 1992)*

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/16184

B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS

(online or library or demand) and (mobile or portable) and server and client and authoriz?

Proquest IEEE Publications OnDisc

authentication

digital signature

Form PCT/ISA/210 (extra sheet)(July 1992)*

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)